



## Installation Instructions Tailgate Lock PL3400

Dodge Ram 1500, 2002 and up  
Dodge Ram 2500 and 3500, 2003 and up

### Contents:

Lock Assembly, 2 keys  
Instructions, Warranty Card  
Alcohol Wipe


### Tech Support:

Call 1-800-342-5911

1.


NOTE: The area where the tape will adhere to the bezel has to be cleaned with the alcohol wipe first. Do not install if the temperature is below 60° F.

Read all instructions before proceeding with installation.

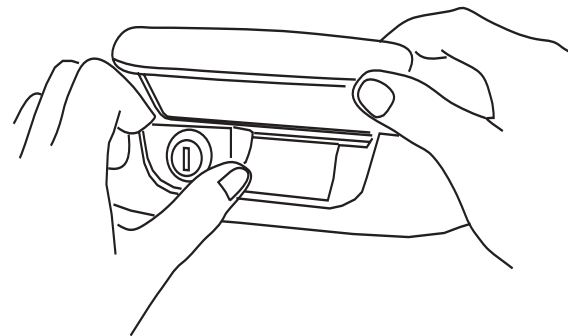


2.

Lift the handle up all the way and insert the Lock Assembly into the pocket under it. Tilt it up so that the two hooks slide into the cutouts for the handle arms. The top edge of the Lock Assembly should clear the bottom edge of the handle. Push it in evenly and forcefully until the hooks snap into place. NOTE: If the handle doesn't clear, remove the tailgate access panel and release the rods to get additional lift.

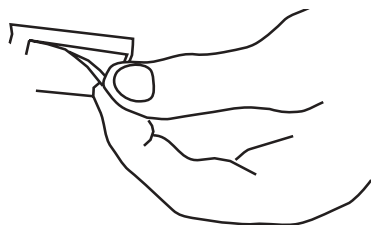

3.

After the hooks have snapped into place lift the lock up slightly and peel off the backing from the adhesive tape on the underside of the lock.

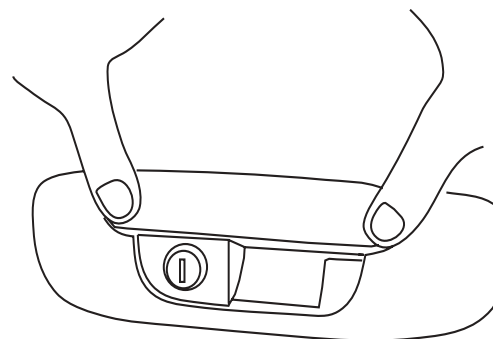

4.

Press down on the handle for at least 10 seconds to seat the Lock Assembly fully. Do not use the lock for 72 hours after installation to let the adhesive on the tape cure fully.