

Contents:

Lock Assembly, 2 keys
1/4-20 One-Way Screw
1/4-20 Hex Head Bolt
Large Washer
Instructions, Warranty Card

Tools Required:


#40 Torx Driver
Screw Driver

Tech Support:

Call 1-800-342-5911

NOTE: POP&LOCK is designed to secure the passenger side latch. You may experience that the driver's side latch can open due to the flex in the handle, but the tailgate will still remain locked.


If the tailgate should open, an adjustment is required to the rods that run from the handle to the latches. Remove the rod on the driver's side from the latch side of the tailgate. Once removed the rod will be in the shape of a 'Z'. Straighten out BOTH bends by a few degrees, effectively lengthening the rod and re-install. The Pop&Lock should now secure the tailgate.

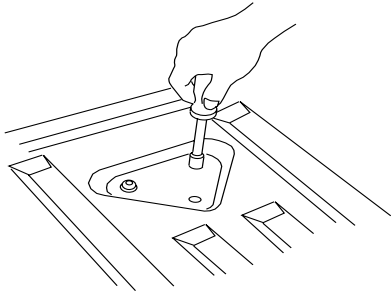

1.

Lower the tailgate.


Remove the center bolt and loosen the other two bolts.

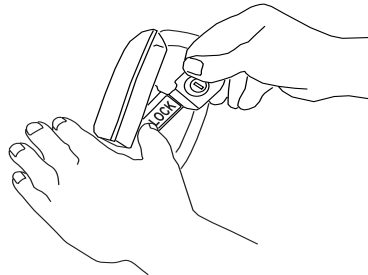

2.


Lift the handle and insert the POP&LOCK between the handle and the plastic insert.

This is a tight fit and it helps to loosen the handle bolts.



3.

Slide the POP&LOCK into place all the way to the right side.

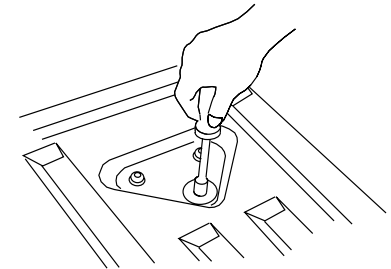

4.

Place the 1/4-20 hex bolt with the large washer into the rear and screw it into the POP&LOCK.

Insert a screw driver in the slot between the handle and the POP&LOCK to spread them apart as you tighten all the bolts.